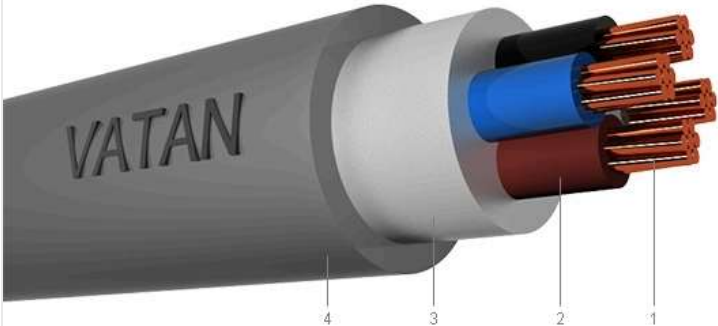
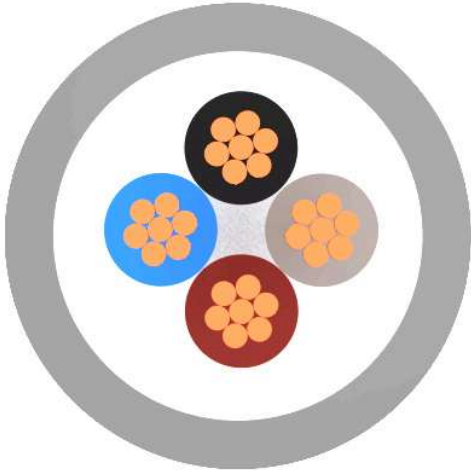


HALOGEN-FREE FLAME RETARDANT MULTICORE COPPER CONDUCTOR CABLES NHXMH

NHXMH

			
NHXMH 300/500 V TSEK VDE 0250		Structure 1. One or stranded copper conductor 2. XLPE isolated 3. HFFR filler 4. HFFR outer sheath	
Technical Information Permissible operating temperature: 90°C Short circuit temperature: 250°C Laying temperature min: -20°C		Place of Use It is used in hospitals, shopping malls and fire-hazardous facilities with a large number of people. These cables do not transmit flame during fire, do not create dense smoke, thus ensuring the safety of life and property.	

Technical Specifications				
Nominal Cross-Section	Cable Outer Diameter (Approx.)	Current Carrying Capacity	Conductor DC Resistor	Cab
<i>Rated Cross Section</i>	<i>Overall Diameter of Cable (Approx)</i>	<i>Current Carrying Capacity</i>	<i>Conductor DC Resistance</i>	<i>N</i>
mm2	mm	A	ohms/km (20°C)	
2 x 1.5	8,30	22	12,1	
2 x 2.5	9,10	30	7,41	

2 x 4	10,40	40	4,61	
2 x 6	11,40	51	3,08	
2 x 10	15,00	70	1,83	
2 x 16	16,40	94	1,15	
3 x 1.5	8,70	22	12,1	
3 x 2.5	9,60	30	7,41	
3 x 4	11,00	40	4,61	
3 x 6	12,50	51	3,08	
3 x 10	15,90	70	1,83	
3 x 16	17,80	94	1,15	
4 x 1.5	9,30	19	12,1	
4 x 2.5	10,30	25	7,41	
4 x 4	12,30	34	4,61	
4 x 6	13,90	43	3,08	
4 x 10	17,30	60	1,83	
4 x 16	19,40	80	1,15	
5 x 1.5	10,00	19	12,1	
5 x 2.5	11,10	25	7,41	
5 x 4	13,60	34	4,61	
5 x 6	15,00	43	3,08	
5 x 10	18,80	60	1,83	
5 x 16	21,40	80	1,15	